


NEC

Virtual Remote Tool **Pro**

User's Manual

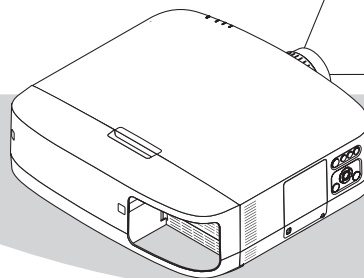

NEC's Remote



Introduction

The Virtual Remote Tool Pro is a software application for operating NEC projectors from an iPad, iPhone, iPod touch or other iOS device (hereafter referred to collectively as "iOS devices").

These instructions explain basic operation of the Virtual Remote Tool Pro.

Launching the Software

Preparations

Make the iOS device's Wi-Fi settings.

Make the wireless LAN settings at Settings] → [Wi-Fi] → [Select Network].

1. Press the sleep on/off button on the upper right of the iOS device.

The sleep mode is canceled and the screen appears.

If the software is already running, press the Home button to display the screen showing the software icons.

2. Tap "NEC's Remote", the Virtual Remote Tool Pro's icon.

The Virtual Remote Tool Pro's main screen appears.

NOTE

- Some functions of this software may not be usable, depending on the projector being used.
- The operation of holding the button is not supported.

Names and Functions of Screen Parts

The operating buttons are divided between three pages. Flick to switch the screen.

[Main Screen – Page 1]


List

This displays a list of NEC projectors connected to the network. The selected projector is connected to.

Names and IP addresses of currently connected projectors

Ver.

This displays this software's version.

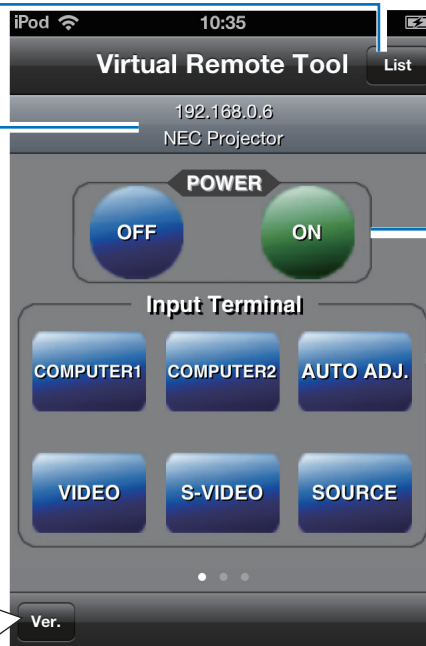

POWER

POWER ON button

This turns on the projector's power when it is in standby.

POWER OFF button

This turns off the projector's power (sets it to the standby mode).

Input Terminal

COMPUTER 1 button

This selects the COMPUTER 1 input.

COMPUTER 2 button

This selects the COMPUTER 2 input.

AUTO ADJ. button

This automatically adjusts the picture to the optimum conditions when projecting the computer's screen.

VIDEO button

This selects the Video input.

S-VIDEO button

This selects the S-Video input.

SOURCE button

This detects and selects the input signal.

[Main Screen – Page 2]


List

This displays a list of NEC projectors connected to the network. The selected projector is connected to.

Names and IP addresses of currently connected projectors

Ver.

This displays this software's version.

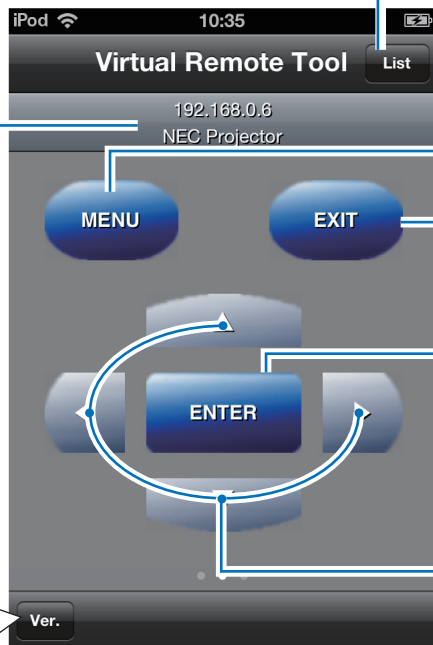

MENU button

This displays the on-screen menu for making various settings and adjustments.

EXIT button

When the on-screen menu is displayed, tap this to return to the previous level in the menu. When the cursor is at the main menu, tapping this closes the menu.

When a confirmation message is displayed, tapping this cancels the operation.

ENTER button

When the on-screen menu is displayed, tap this to move on to the next level in the menu.

When a confirmation message is displayed, tapping this enters the item.

▲▼◀▶ buttons

Use these for on-screen menu operations and in combination with the D-ZOOM +/- buttons.

[Main Screen – Page 3]

List

This displays a list of NEC projectors connected to the network. The selected projector is connected to.

Names and IP addresses of currently connected projectors

Ver.

This displays this software's version.



D-ZOOM +/- buttons

These zoom the screen in and out digitally.

Control

PICTURE button

This displays the picture adjustment items.

ASPECT button

This displays the aspect adjustment items.

AV-MUTE button

This temporarily turns off the picture and sound. Press again to return.

ECO button

This displays the eco mode selection screen.

FREEZE button

This sets the currently displayed image to a still picture. Press again to return.

HELP button

This displays the projector's information screen.

VOLUME +/- buttons


These adjust the internal speakers' volume. The volume of the audio output terminals is also adjusted.

[Projector List screen]

When [Projector List] is selected on the main screen, the projectors connected to the network are detected automatically and displayed as a list. When a projector is selected, the main screen reappears.

Names and IP addresses of currently connected projectors

Config
This displays the Config screen, used to specify the IP addresses manually.

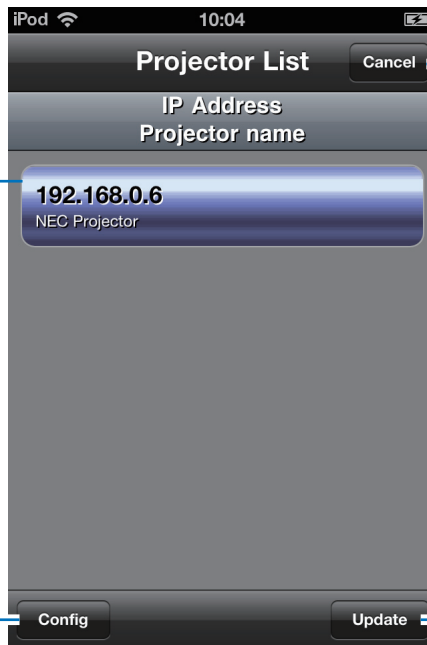


Cancel

Tap this to return to the main screen without making any changes.

Update

This redetects the projectors on the network. If network projectors have been added or changed, tap the [Update] button to update the projector list to the latest information.

[Config screen]

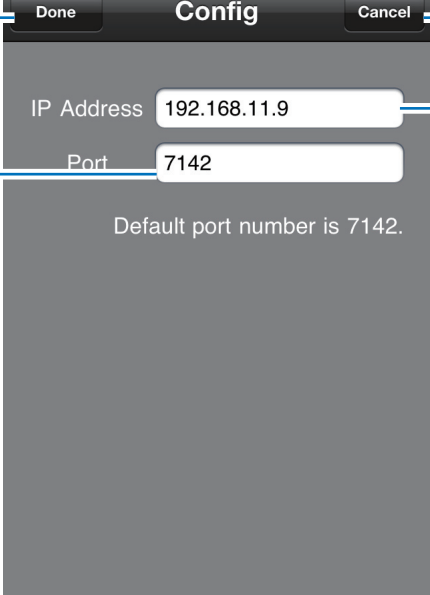

Done
Tap this to enable the settings and return to the Projector List.

Cancel
Tap this to return to the Projector List screen without making any changes.

Port
When the white frame is tapped, the software keyboard appears and the port number can be input manually.

IP Address
When the white frame is tapped, the software keyboard appears and the IP address can be input manually.

NOTE
Check with the projector's administrator before changing the port number. The port number is initially set to 7142.

Trademarks

iPhone®, iPad® and iPod touch® are registered trademark of Apple Inc. in the United States and other countries.